

SOL-SYS5W

High Efficiency, High Quality PV Module


Electrical Characteristics

SOL-SYS5W	
Maximum power (Pmax)	5W
Voltage at Pmax (Vmp)	18.3V
Current at Pmax (Imp)	0.28A
Open-circuit voltage (Voc)	23.2V
Short-circuit current (Isc)	0.29A
Temperature coefficient of Voc	$-(0.40 \pm 0.05)\% / ^\circ C$
Temperature coefficient of Isc	$(0.065 \pm 0.01)\% / ^\circ C$
Temperature coefficient of power	$-(0.5 \pm 0.05)\% / ^\circ C$
NOCT (Air 20°C; Sun 0.8kW/m ² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	+ 3%
Cells	multicrystalline silicon solar cell
No. of cells and connections	36(4X9)
Module Dimension	251mm[9.88in.]x186mm[7.32in.]x17mm[0.66in.]
Weight	0.60kg[1.33lbs]


* STC:Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

* Specifications are subject to change without notice at any time.


Module Diagram

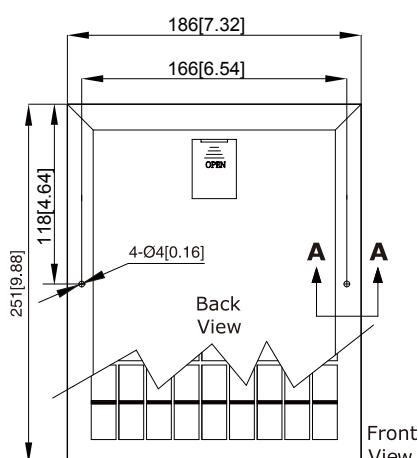

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit:mm[in.]




Junction Box
Top View (Lid open)





Section A-A

I-V Curves

I-V Curves of PV module SOL-SYS5W

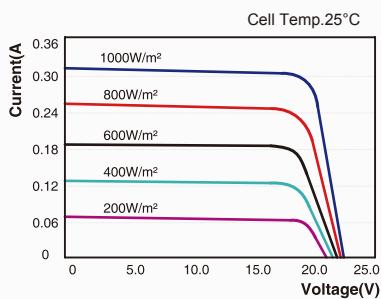

I-V Curves of PV module SOL-SYS5W at various cell temperatures

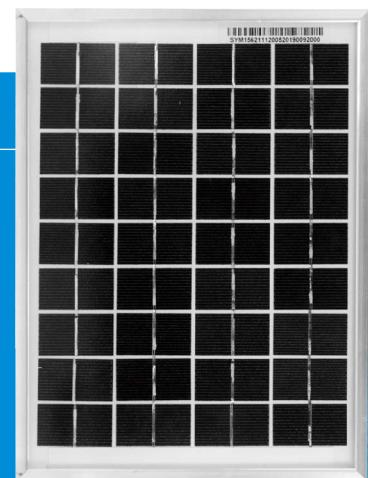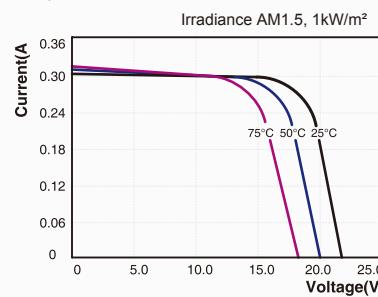

Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 20 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module,passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacturer is certified for ISO 9001:2000

Product's Guarantee

- 5 years products life warranty
- 15 years module power output no less 90%
- 20 years module power output no less 80%

Applications

- Of grid residential roof-tops
- Of grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications



NEMTEK

NEMTEK(PTY)LTD

Address: Northriding commercial Park
Stand 251, Aintree Street Northriding
Randburg
TEL: 27 11462 8283
TAX: 27 11462 7132