


# SOL-SYS80W

## High Efficiency, High Quality PV Module

### Electrical Characteristics

### SOL-SYS80W

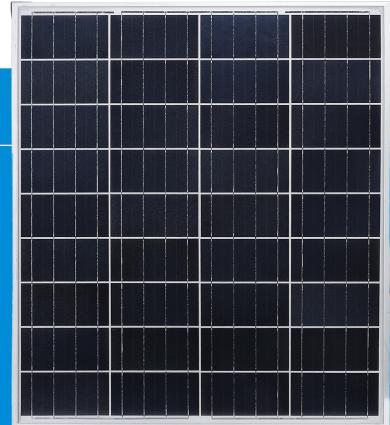


Maximum power (Pmax)	80W
Voltage at Pmax (Vmp)	18.3V
Current at Pmax (Imp)	4.38A
Open-circuit voltage (Voc)	23.2V
Short-circuit current (Isc)	4.53A
Temperature coefficient of Voc	$-(0.40 \pm 0.05)\% / ^\circ C$
Temperature coefficient of Isc	$(0.065 \pm 0.01)\% / ^\circ C$
Temperature coefficient of power	$-(0.5 \pm 0.05)\% / ^\circ C$
NOCT (Air 20°C; Sun 0.8kW/m <sup>2</sup> wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	+ 3%
Cells	multicrystalline silicon solar cell
No. of cells and connections	36(4X9)
Module Dimension	780mm[30.71in.]x670mm[26.38in.]x30mm[1.18in.]
Weight	6.1kg[13.45lbs]

\* STC:Irradiance 1000W/m<sup>2</sup>, AM1.5 spectrum, module temperature 25°C

\* Specifications are subject to change without notice at any time.

### Module Diagram

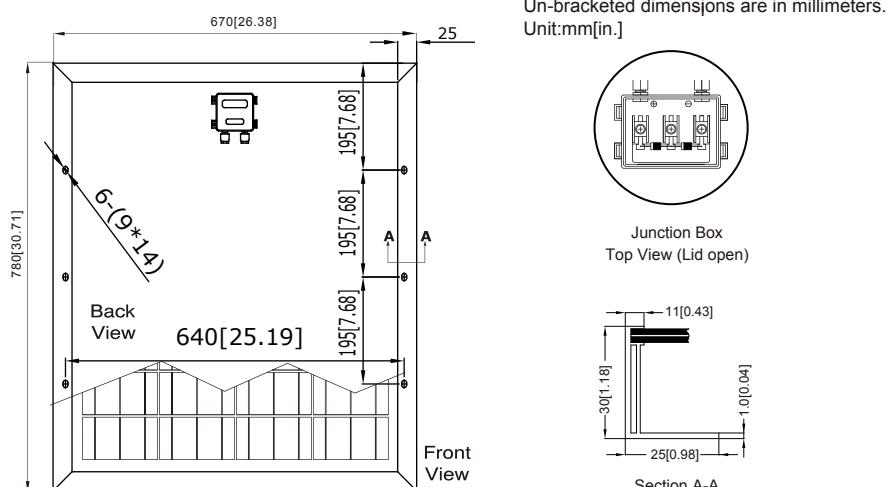

### Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 20 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module,passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacturer is certified for ISO 9001:2000

### Product's Guarantee

- 5 years products life warranty
- 15 years module power output no less 90%
- 20 years module power output no less 80%

### Applications

- Of grid residential roof-tops
- Of grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications



**NEMTEK**

### NEMTEK(PTY)LTD

Address: Northriding commercial Park  
Stand 251, Aintree Street Northriding  
Randburg  
TEL: 27 11462 8283  
TAX: 27 11462 7132

